




# Application Tips

## RUBBER TRACK

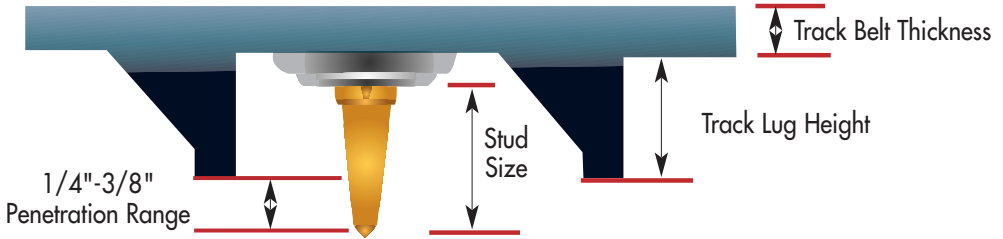

All Woody's® stud sizes are measured from the top of the Digger™ support plate to the tip of the stud.

### WOODY'S® PENETRATION RECOMMENDATION FOR TRAIL RIDING IS 1/4" - 3/8"

LUG HEIGHT	STUD SIZE	PENETRATION RANGE	OVERALL LENGTH	GOLD DIGGER® 60° TRACTION MASTER®		MEGA-BITE® 60°	SIGNATURE SERIES™ 60°
				7mm	5/16"	5/16"	5/16"
*VARIABLE -0-3%		*VARIABLE +/- .015	5/16" STUD				
0.750	*0.875	.345-.375	1.260	GDP6-8750	GDP6-8755	MEG-8755	-
0.820	0.875	.295-.325	1.260	GDP6-8750	GDP6-8755	MEG-8755	-
	*0.920	.320-.350	1.327	GDP6-9200	GDP6-9205	-	-
	1.000	.400-.430	1.410	GDP6-1000	GDP6-1005	MEG-1005	SSP-1005
0.850	0.875	.245-.275	1.260	GDP6-8750	GDP6-8755	MEG-8755	-
	*0.920	.310-.340	1.327	GDP6-9200	GDP6-9205	-	-
	1.000	.370-.400	1.410	GDP6-1000	GDP6-1005	MEG-1005	SSP-1005
0.880	0.875	.215-.245	1.260	GDP6-8750	GDP6-8755	MEG-8755	-
	*0.920	.270-.300	1.327	GDP6-9200	GDP6-9205	-	-
	1.000	.350-.380	1.410	GDP6-1000	GDP6-1005	MEG-1005	SSP-1005
0.910	*1.000	.320-.350	1.410	GDP6-1000	GDP6-1005	MEG-1005	SSP-1005
	1.075	.390-.420	1.485	-	GDP6-1075	MEG-1075	SSP-1075
0.920	*1.000	.310-.340	1.410	GDP6-1000	GDP6-1005	MEG-1005	SSP-1005
	1.075	.380-.410	1.485	-	GDP6-1075	MEG-1075	SSP-1075
1.000	1.000	.220-.250	1.410	GDP6-1000	GDP6-1005	MEG-1005	SSP-1005
	*1.075	.300-.330	1.485	-	GDP6-1075	MEG-1075	SSP-1075
1.100	*1.175	.320-.350	1.575	-	GDP6-1175	MEG-1175	SSP-1175
1.250	*1.325	.320-.350	1.730	-	GDP6-1325	MEG-1325	SSP-1325
1.375	*1.450	.345-.375	1.852	-	GDP6-1450	MEG-1450	SSP-1450

\*Woody's recommends .250" to .375" to be optimum penetration. Deviating from this recommendation can result in premature track wear, tunnel damage and/or loss of control.

[www.woodystraction.com](http://www.woodystraction.com) • E-mail: [woody@wiem.com](mailto:woody@wiem.com)

International Engineering & Mfg., Inc. • 6054 N. Meridian Road • Hope, MI 48628  
989-689-4911 • Fax 989-689-4910 • © IEM 2004. All rights reserved.